

Updating UI Library


1. After updating the memory Board, we need to update its UI library .First we need a 2G SD card, see the sample below



2. Copy the folder named DTP70500 to the root directory of the SD card, see below




3. Insert the SD card into the slot of the of the Memory Board and power the monitor, see below

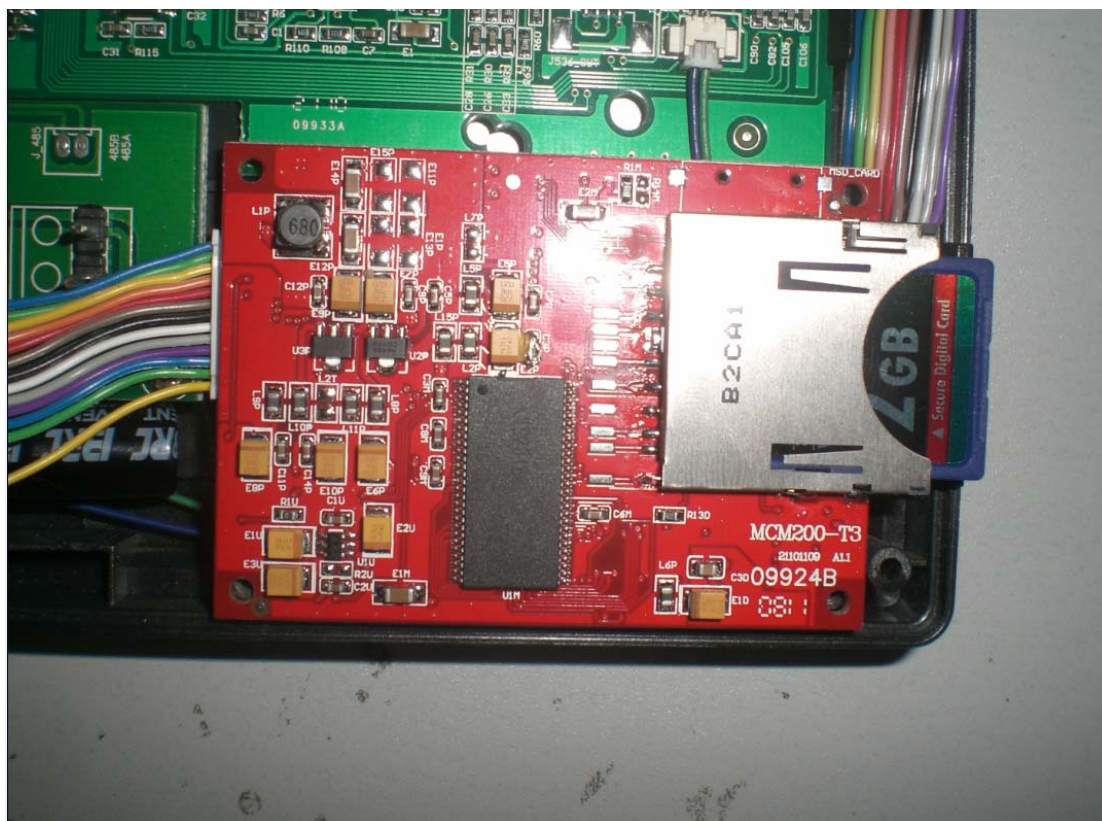


4. Touch the screen twice until it shows as below, then touch the Logo, see below



5. Touch the screen anywhere and hold for 3 seconds till it switches to a new interface

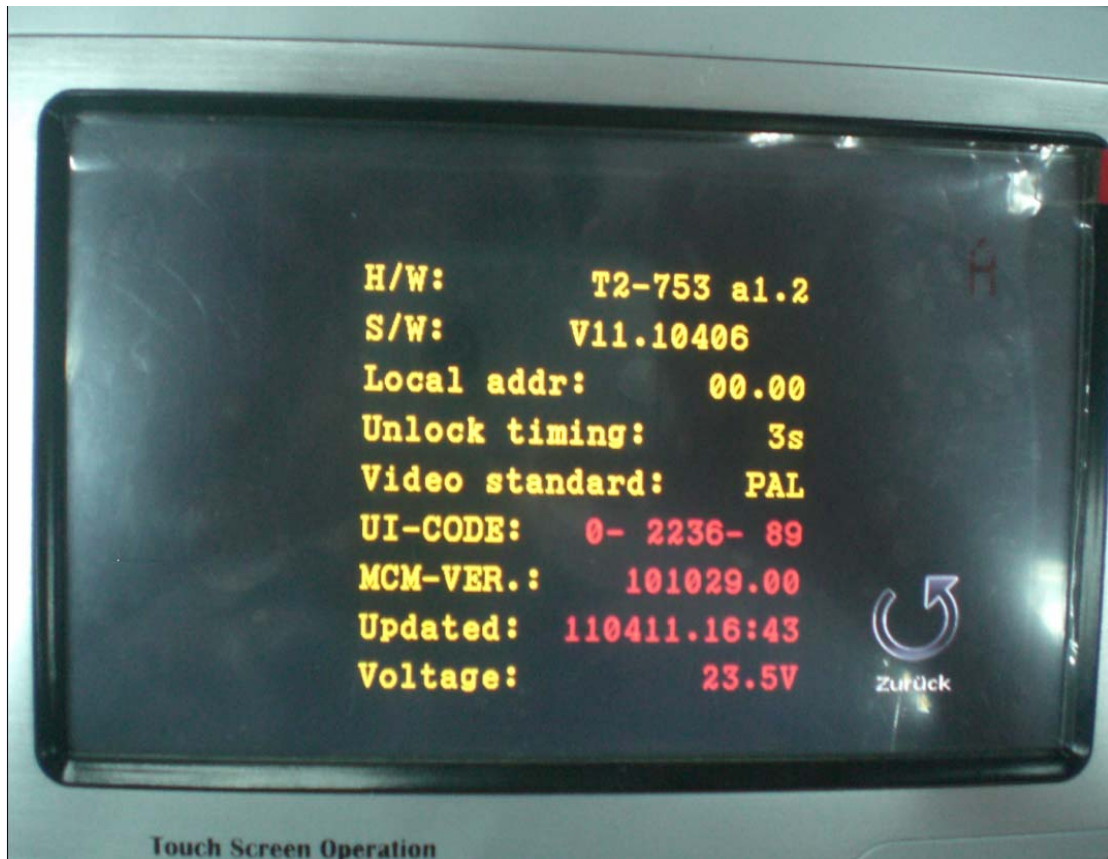

6. Then touch the set up icon , see below

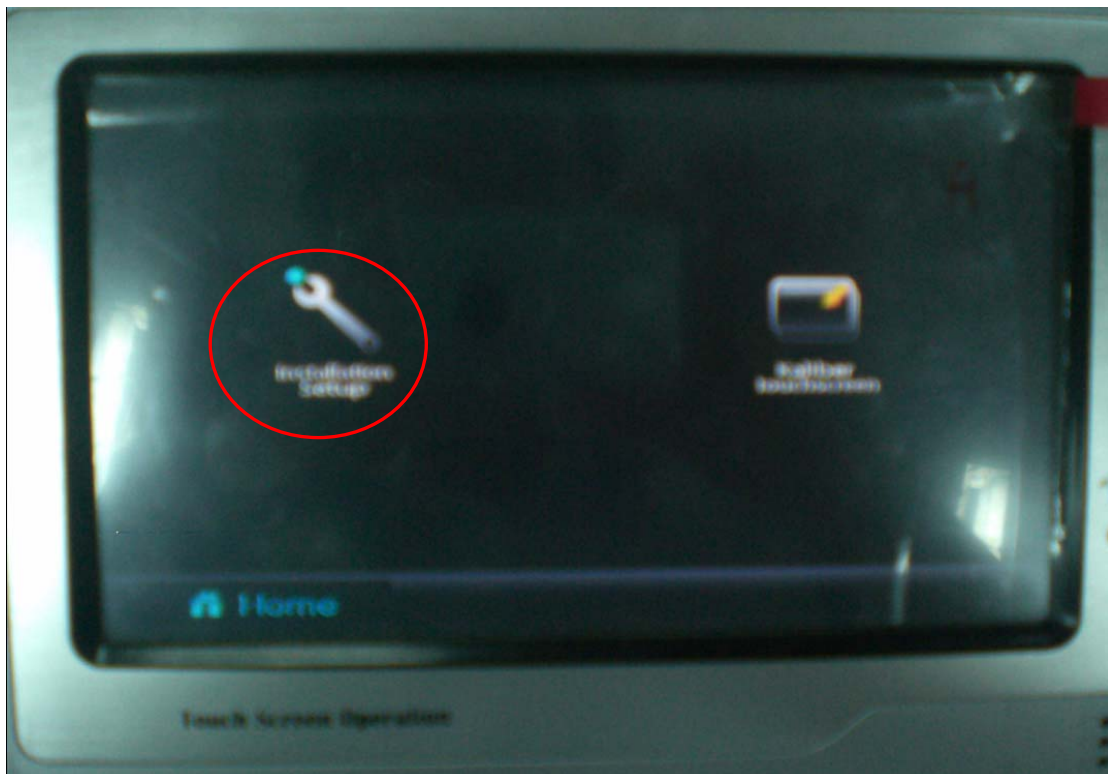

- 7 .Now on the virtual keypad, input 8105#, and it starts to update the UI Library automatically.
After finishing the process, the screen will be off . Restart the power to complete the updating.

