

DS-KD-KK

Video Intercom Nametag Module



Key Feature

- Dial the resident at one-touch
- Backlight compensation
- Easy and extend

Available Model


DS-KD-KK




Specification

Model		DS-KD-KK
System parameters	Processor	Embedded MCU Processor
	Operation method	Physical Button
Interfaces	Module-connecting	2(1 Input, 1 Output)
	Debug	1
General	Physical button	6
	DIP Switch	8
	Power supply	Powered by DS-KD8003-IME1
	Power consumption	≤2 W
	Working temperature	-40° C to +60° C (-40° F to 140° F)
	Working humidity	10% to 95%
	IP protection level	IP65
	Installation	Flush Mounting, Surface Mounting
Dimensions (L × W × H)	98.21 mm × 100.21 mm × 33.7 mm (3.87" × 3.95" × 1.33")	

Typical Application

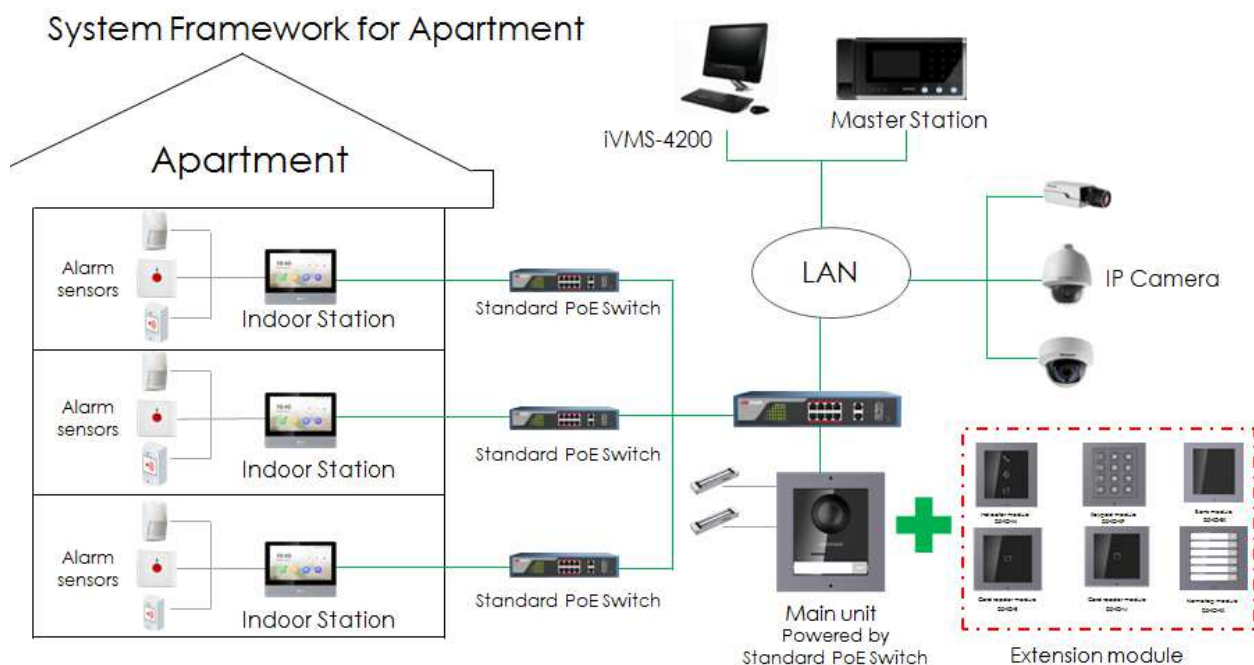

Appearance and Interface

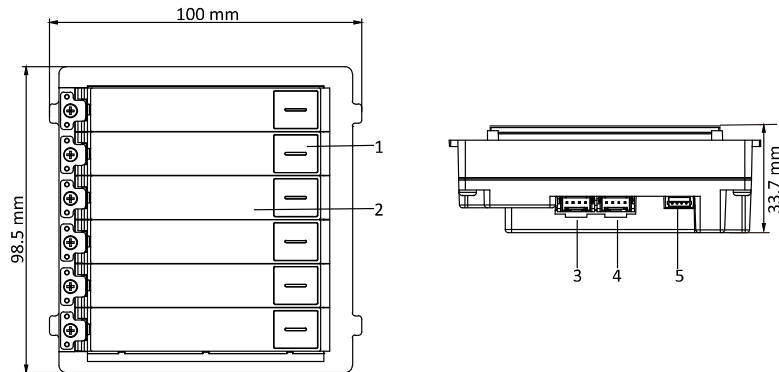

No.	Description
1	Call Button
2	Name Tag
3	Module-connecting Interface(output)
4	Module-connecting Interface(input)
5	Debug

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com