

## 4. Operation Instructions

### ■ Basic Video Door Phone Operations

- 1) If somebody calls, you don't have to walk to the Monitor, and then see the caller's image and unlock the door. You can just switch your TV to AV channel, you will see the caller image on TV screen, and press **D Button** on Remote-Control unit will open the door.
- 2) When you are watching TV, you can survey Outdoor Cameras on TV screen. To do this, switch your TV to AV channel, then press **A Button** on Remote-Control unit to monitor the Outdoor Station. If multi cameras are installed, you can switch and survey all cameras in sequence by pressing the **A Button**. In monitoring state, press **D Button** will also open the door.

### ■ Operation for Color Memo

Note: This function is only available when your Monitor is Color Memo model.

- 1) When the Monitor is turned on, press **C Button** on Remote-Control unit, an image will be record manually.
- 2) To browse the color image memory, press **B Button** on Remote-Control unit when the Monitor is standby, then the screen will be turned on and the latest picture will be showed.
- 3) During playback state:  
Use **B Button** to view forwardly to see next image.  
Use **C Button** to view backwardly to see last image.  
Use **D Button** to delete, and a tip 'DELETE?' will be showed on the upper right of the screen, press **D Button** again to confirm, the current picture will be deleted.


Note: The operation of Remote Control Unit is independent of TV connection, you can use it even if your Monitor isn't connected to TV.

## USING REMOTE-CONTROL UNIT

### SETUP AND OPERATION MANUAL

VT-ENG-RM-V1-2900 Version 1.1 090303

#### 1. Parts and Function

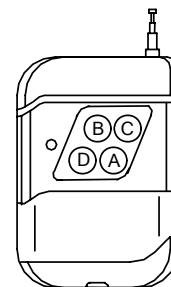

**[A] Button:** In standby, to turn on Screen and monitor the Outdoor Station, same as MONITOR & TALK Button on Monitor.

**[B] Button:** For Color Memo function, use this button to start playback operation, and to view next image in playback state.

**[C] Button:** For Color Memo function, to record an image when Monitor screen is turned on. However, in playback state, use this button to view last image.

**[D] Button:** Use this button to open the door when Monitor screen is turned on in calling or monitoring. However, in playback state, use this button to delete.

#### ■ Note

- 1) Remote control distance is normally up to 50 meters, and will extend if the built-in telescopic antenna is taken out.
- 2) If the controllable distance is becoming shorter, or LED isn't light on when press any button, open the remote control unit and replace the battery with a new one.
- 3) Please note, if your Monitor doesn't have the Color Memo function, it will not response the related buttons.

The design and specifications can be changed without notice to the user.


Right to interpret and copyright of this manual are preserved.

#### **WARNING**

Don't attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer servicing to qualified service personnel.


## 2. Connect Video Output To A TV

### 2.1 For installation with only one Monitor

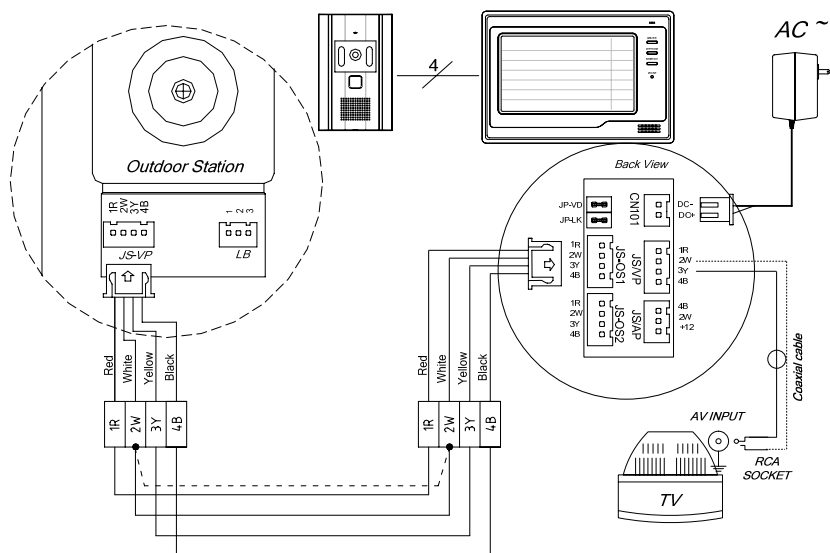

Note: Connect AV input with JS/VP (2W/GND and 3Y/VIDEO), by means of coaxial cable. For other parts of wiring, see Monitor's manual for reference.





### 2.2 For installation with two or more Monitors

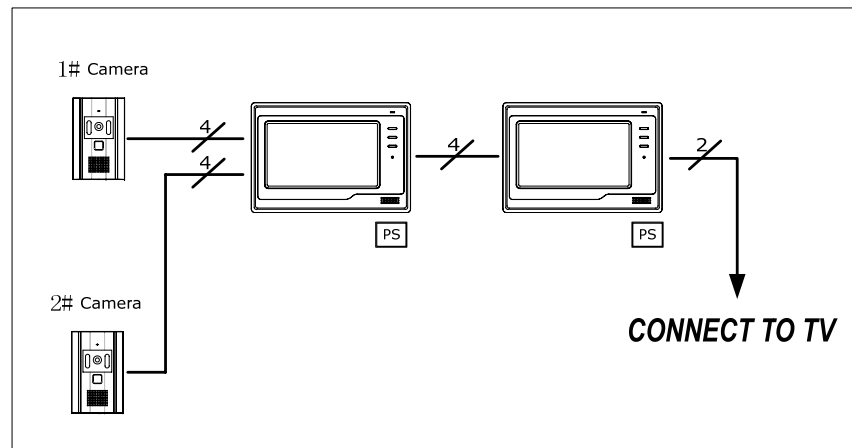

Note: Connect AV input with JS/VP (2W/GND and 3Y/VIDEO) of the last Monitor, and same wiring with 2.1 drawing.

## 3. Setup the Remote Control Unit

- 1) During standby state, touch the screen to display MAIN MENU, then touch and enter SETUP MENU. (For the uon-Touch screen version Monitor, use the buttons to get in to the setup menu)
- 2) Select INSTALLATION... item.
- 3) Touch the numbers to input password '2008' to enter the installation page (For uon-Touch screen Monitor, use ▲/▼ or +/- button, to increase / decrease the current digit, press ► or Menu button to shift to the next digits in turn, until 4 numbers are finished.)
- 4) Select ADVANCED SET... item, and 2 sub items are shown:  
1 ADD REMOTE  
2 DEL REMOTE
- 5) To add a Remote Control Unit to the Monitor, Select 1 ADD REMOTE, then press any key of the remote. After this operation, the Remote Control Unit is assigned to this Monitor.
- 6) Select 2 DEL REMOTE to remove the Remote Control Unit assignment immediately.

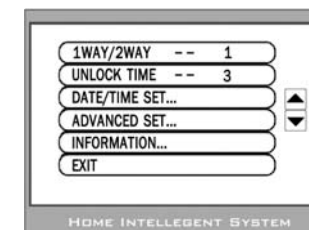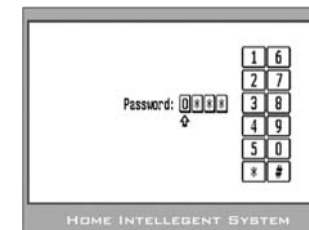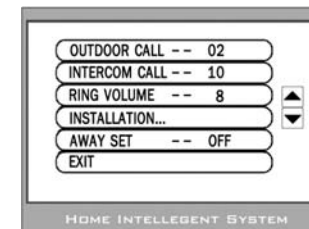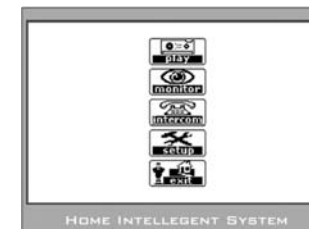

Note: Total 5 Remote Control Units can be assigned to a Monitor. Each Remote Control Unit can be assigned to Multi Monitors and control them at the same time.